CONVEYOR COMPONENTSPROFILES


UHMW Half-Round Rod Covering Turn your Round Profile into an enhanced wear surface. Covering is designed to snap on with ease and stay in place. Easy to remove or replace with minimal down time. R 312 R.375 .093 .500 .625 .750 .093 .375 .468 R .250 R .406 R 375 → | ← .031 TSE-365W-5/8" TSE-364-1/2" TSE-366-3/4" TSE-367-3/4" TSE-368-3/4"



Teflon® Profiles for High Temp Applications


Advantages:

- FDA Compliant
- For use in environments up to 500°F
- Little to no water absorption
- Lowest coefficient of friction
- High corrosive resistance
- Standard length 120"




Nylon Profiles for Improved Wear Resistance *Advantages:*

- Enhanced wear performance
- Handles higher loads and speeds
- For use in environments up to 250°F
- Standard length 120"

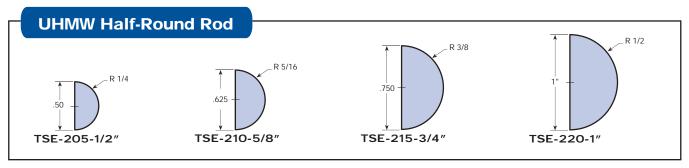

CONVEYOR COMPONENTS TEFLON® PROFILES

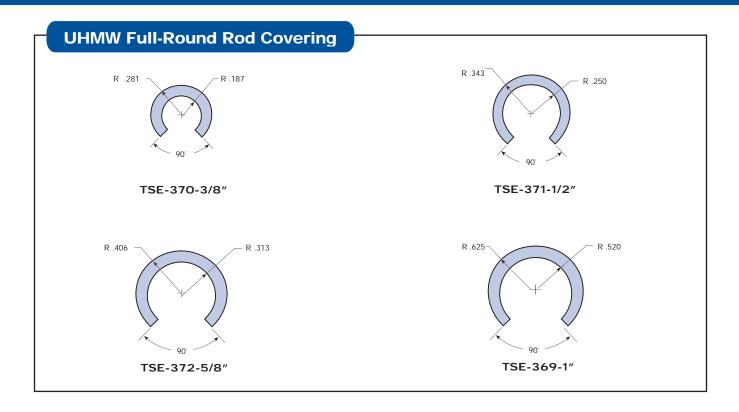



| TSE Part Number | To Fit | Wall THK. |
|-----------------|---------|-----------|
| TSE 602-TFE | 1/4" ID | .093 |
| TSE 370-TFE | 3/8" ID | .093 |
| TSE 371-TFE | 1/2" ID | .093 |
| TSE 372-TFE | 5/8″ ID | .093 |
| TSE 603-TFE | 3/4" ID | .093 |
| TSE 604-TFE | 1″ ID | .093 |